


FOSC-001 Horizontal Box Specification

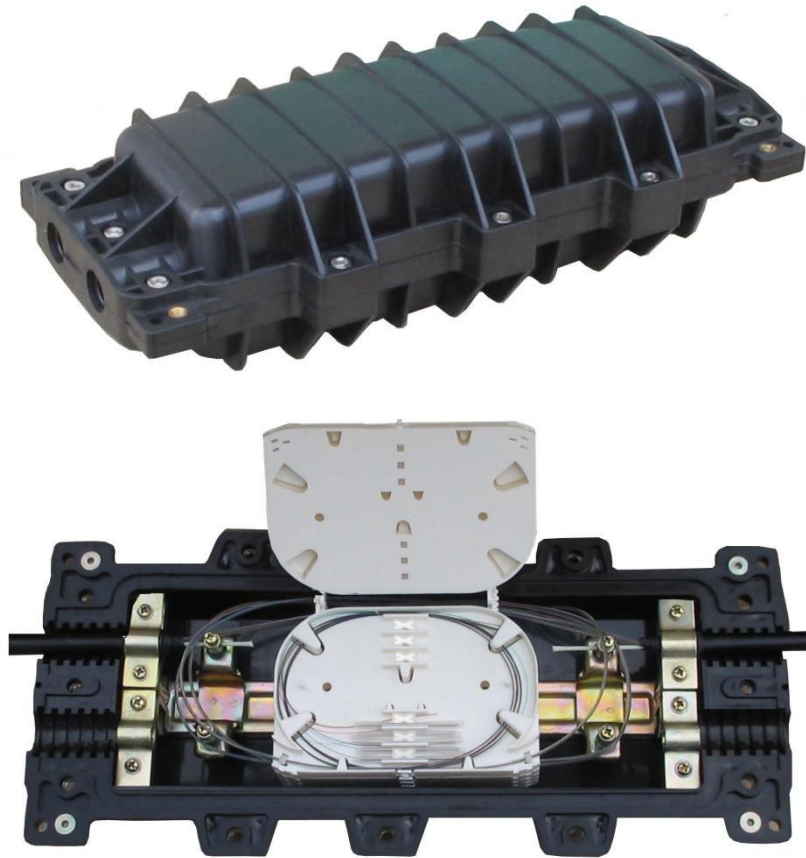

FOSC-001 provide with 4 fiber cable in-out round ports and the cable diameter is from $\Phi 10$ - $\Phi 22$. It can be used in aerial, duct, and direct buried application. This product is made from the high-quality and with the mechanical sealing structure filled with the sealing material. The external component and fastening piece are all made from the high-quality stainless steel. It can be opened after sealing.

Available for duct, Aerial, Direct buried

Item	FOSC-001
Dimension (mm)	435×190×120
Weight (Kg)	2.8
Cable diameter (mm)	$\Phi 10$ - $\Phi 22$
Cable entry ports	Two cable entry port on each end
Max capacity of fiber splice	24(single)
Max Capacity of splice tray	8
Max capacity	192(single)
Sealing structure	Sticky cincture

Kit contents



Description	Type	Quantity
Splice protector tube		According to the fiber cores
Sticky cinchure	Widen	1pcs
Sticky cinchure	Narrow	2pcs
Insulated robber belt		1pcs
Cables ties		4×splice tray
Sealing washer		4sets
Block		2 (piece)
Marking note		4×fiber cores
Hanging hook	Aerial-hanger	1pair
Allen wrench	6mm	1pcs

Pack information

Inner carton dimension(mm)	Inner carton weight (kg)	Outside carton dimension (mm)	Outside carton weight (kg)	No of units per carton (pcs)
496*196*138	2.8	515*425*575	23. 8	8